


**SINGLE DRUM VIBRATORY ROLLER
BW 215 D-40**

PERFORMANCE DATA

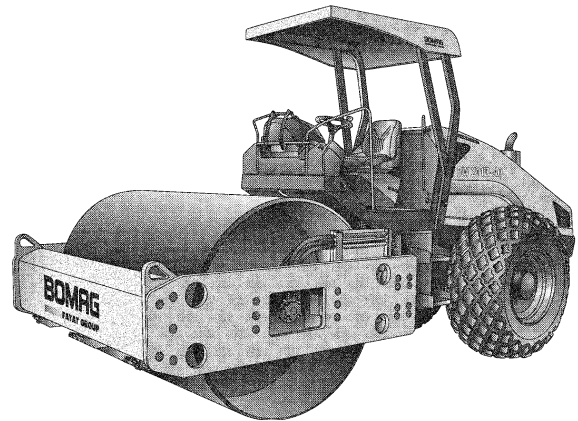


Machine type	Compaction output (m ³ /h)			
	Rock fill	Gravel, sand	Mixed soil	Silt, clay
BW 215 D-40	500-950	350-750	280-550	190-370

Machine type	Compacted layer thickness (m)			
	Rock fill	Gravel, sand	Mixed soil	Silt, clay
BW 215 D-40	0,90	0,60	0,50	0,25

Technical Data

Shipping dimensions in m3	without ROPS	with ROPS H2
BW 215 D-40	30,933	40,712

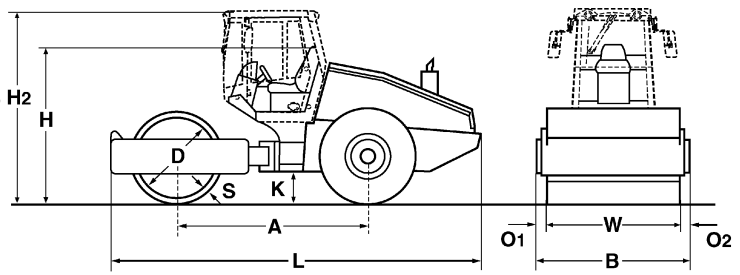

Standard Equipment

- Warning, information and operation displays with round gauge
- Hydrostatic travel and vibration drive
- Hydrostatic articulated steering
- Articulated joint lock
- Rear axle with twin spring accumulator brakes
- No-Spin differential lock
- Warning horn
- Single lever control for travel and vibration
- Scrapers
- Emergency STOP
- Back-up warning system
- Operator seat

Optional Equipment

- ROPS/FOPS cabin with seat belts
- Working lights front / rear
- ROPS/FOPS with safety belt
- Comfort driver's seat
- Rotary beacon
- Indicator and hazard lights
- Padfoot segment kit
- Contact scrapers
- BOMAG Evib-Meter (BEM)
- TERRAMETER BTM prof
- BCM 05 Documentation system
- Special painting
- Air condition
- Sun roof
- Warning, information and operation displays
- Radio (Bluetooth)

Dimensions in mm

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 215 D-40	2960	2300	1500	2268	2985	490	5930	85	85	35	2130

Technical Data

Weights

Grossweight	kg	15.600
Max. axle load, drum CECE	kg	9.360
Max. axle load, wheels CECE	kg	6.240
Operating weight CECE w. ROPS-cabin	kg	14.050
Axle load, drum CECE	kg	8.420
Axle load, wheels CECE	kg	5.630
Static linear load CECE	kg/cm	39,5
Max. static linear load CECE	kg/cm	39,5

Dimensions

Track radius, inner	mm	3.494
---------------------	----	-------

Driving Characteristics

Speed (1)	km/h	0- 4,0
Speed (2)	km/h	0- 7,0
Max. gradeability without/with vibr.	%	50/48

Drive

Engine manufacturer		Deutz
Type		BF4M 1013 EC
Emission stage		2/2
Cooling		water
Number of cylinders		4
Performance ISO 3046	kW	114,0
Performance SAE J 1995	hp	153,0
Speed	min-1	2.300
Fuel		diesel
Electric equipment	V	12
Drive system		hydrost.
Drum driven		standard

Drums and Tyres

Tyre size		23.1-26/12PR
-----------	--	--------------

Brakes

Service brake		hydrost.
Parking brake		hydromec.

Steering

Steering system		oscil.artic.
Steering method		hydrost.
Steering / oscillating angle +/-	grad	35/12

Exciter system

Drive system		hydrost.
Frequency	Hz	30/36
Amplitude	mm	1,80/0,90
Centrifugal force	kN	275/202
Centrifugal force	t	28,1/20,6

Capacities

Fuel	l	250,0
------	---	-------

Technical modifications reserved. Machines may be shown with options.



PRE 582 15 001

090414 Sa

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

