



**W 350 H**

**EQUIPO HIDROLIMPIADOR DE ALTAS PRESTACIONES PARA LIMPIEZA URBANA**  
**HIGH PERFORMANCE WATERCLEANER EQUIPEMENT FOR URBAN CLEANING**  
**HOCHLEISTUNGS-AUSSTATTUNG WASSERREINIGUNG FÜR DIE KOMMUNALREINIGUNG**  
**LAVEUSE DE VOIRIE A HAUT RENDEMENT**




W 350 H



www.ausa.com

\*

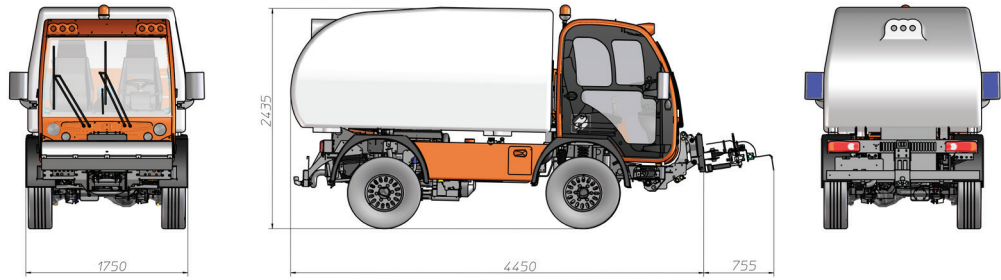

**TECHNICAL SPECIFICATIONS**

**W 350 H**

Load capacity (Kg)		3000
Engine	Make	VOLKSWAGEN
	Type	2.0 TDI EURO 5
	Potencia (kW/CV)	75 - 102 (3000 rpm)
	Nº of cylinders	4
	Cooling	Liquid
	Fuel	Diesel
	Tank capacity (lts)	85
Transmission		2 Hydrostatic ratios and 2 gear on reduction box
	Speed	Limited to 40 Km/h / Optional 62 Km/h available in certain countries
	Traction	4x2 continuous with central differential system and rear locking differential on rear axle 4x4 disconnectable with FullGrip®
Gradient negotiable (with full load)		38%
Brakes	Service	Hydraulic pump with servo brake, discs on front wheels and drum on rear wheels Optional ABS+EDB (Standard at 62 km/h)
	Parking	Negative parking brake, hydraulically released
Steering		Hydraulically power-assisted steering
Suspension		Front suspension helicoidal spring & hydraulic damper Rear suspension parabolic leaf spring & Hydraulic damper
Attack	Obstruction angle	26°
	Departure angle	62°
Weight (Kg)	Unloaded weight *	3455 - 3575 (1845-1940 front axle ; 1610-1655 rear axle)
	Gross weight	6400 (2650 front axle ; 3750 eje rear axle)
Hydraulic flow		Steering pump 12 l/min. Service pump 1: 35 l/min. // Service pump 2: 30l/min.
Hydraulic power take-off		8 front, 6 rear. Presión máx. 180 bar / Max. flow. 60 l/min.

**STANDARD EQUIPMENT**

- Front plate for attachments
- Chassis LINKSystem®
- Polyester tank capacity 1800l
- Racor for filling water in right side
- The high pressure pump is powered by an hydraulic motor driven by the main hydraulic circuit of the truck
- High pressure pump with a maximum delivery of 17l/min. at 210 bar
- Hydraulic pump and motor without CO2 emissions and very low noise level
- Hose reel of 25m with gun and high pressure lance
- Shelving to store cleaning supplies
- Closed cabin with heating
- Electronical setting of rpm engine
- Doors with wide round visibility
- Heated rear mirrors elect. adjustable
- Driver seat with pneumatic suspension
- Passenger seat with mechanical suspension
- Roating beacon with telescopic support
- Wiring for transceiver set
- Radio-CD & MP3 + Bluetooth
- Approved lighting system
- Beacons elect. adjustable
- Wheel wrench

**OPTIONAL EQUIPMENT**

- Optional 62 Km/h available in certain countries
- Hot water boiler (Temperature 80°)
- Cleaning dome with 2 boilers (Temp. 80° with high pressure pump. 38l/min at 200 bar)
- Dispenser for chemical products
- front bar with nozzles to clean with pressure the pavement or the road
- Tacograph
- Air conditioning
- Towing hitch ball (50 mm) with electric socket
- Towing hitch "Rockinger" with electric socket
- Spare wheel
- Passenger seat with pneumatic suspension
- 4x4 rear locking differential