



■ *Designed and Produced To Meet  
And Exceed The Customer's Demands.*

### KEY FEATURES

- Full width screed with paving widths from 4 to 13 feet.
- Dual operator's station
- Hydraulic tow arm hookup
- Dual hopper gates




# Technical Specifications

## 413

Shipping dimensions  
in cubic feet (m<sup>3</sup>)

413

266 (7.53)

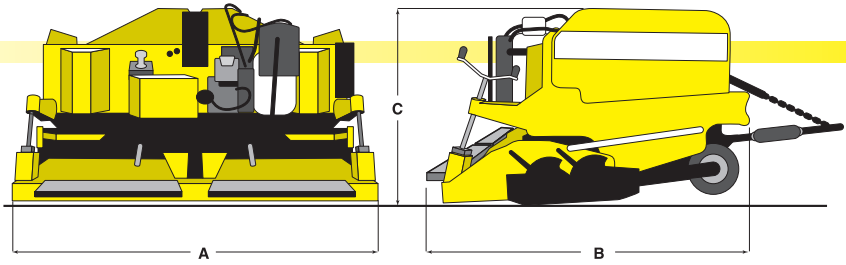

### Standard Equipment

- Pneumatic Tires  
5.39 x 4.50 x 6 PR (Qty 8)
- Hydraulic screed extensions
- Hydraulic screed lift
- Dual 4' hydraulic hopper gates
- Crown / Invert + 3"
- Bolt-on screed wear plates
- Back-up hydraulic systems
- Hydraulic tow arm hook-up

### Optional Equipment

- Ditch Plates

#### DIMENSIONS IN INCHES (MM)

TOW TYPE	A	B	C
413	102 (2591)	75 (1905)	60 (1524)

#### Technical data

Tow Type  
413

#### Weights

Operating Weight ..... lbs (kg) 4250 (1928)

#### Dimensions

Length ..... in (mm) 75 (1905)  
 Width (Transport) ..... in (mm) 102 (2591)  
 Paving Width ..... ft (m) 4-13 (1.2-4.0)  
 Overall Height ..... in (mm) 60 (1524)  
 Paving Depth ..... in (mm) 0-6 (0-152)  
 ..... 5-10 (127-254)

#### Hopper

Capacity ..... tons (tons) 3 (3.36)  
 Wings ..... Hydraulic  
 Deck ..... Fixed  
 Washdown ..... Standard

#### Screed:

Heated ..... Propane  
 Augers ..... Standard  
 Crown / Invert ..... in (mm) 3/3 (76/76)

#### Drive:

Engine Type ..... Honda GX 620  
 Performance SAE J1349 ..... hp (kW) 20 (14.9)  
 Cooling ..... Air  
 Fuel ..... Propane

Technical modifications reserved. Machines may be shown with options.

MODEL	POWER SOURCE	AUGER	HOPPER WINGS	SCREEN HEAT	DEPTH CONTROLS	WASHDOWN	WEIGHT
413	20hp Propane Fueled Engine Electric Over Hydraulic Manual Backups	Standard	Hydraulic	Standard Propane	Hydraulic	Standard	4,250 lbs.

**BOMAG**  
FAYAT GROUP

**BOMAG Americas, Inc.**  
2000 Kentville Rd. • Kewanee, IL 61443  
Tel: 309 853-3571 • Fax: 309 852-0350