


MPH 125 Soil Stabilizer / Asphalt Recycler

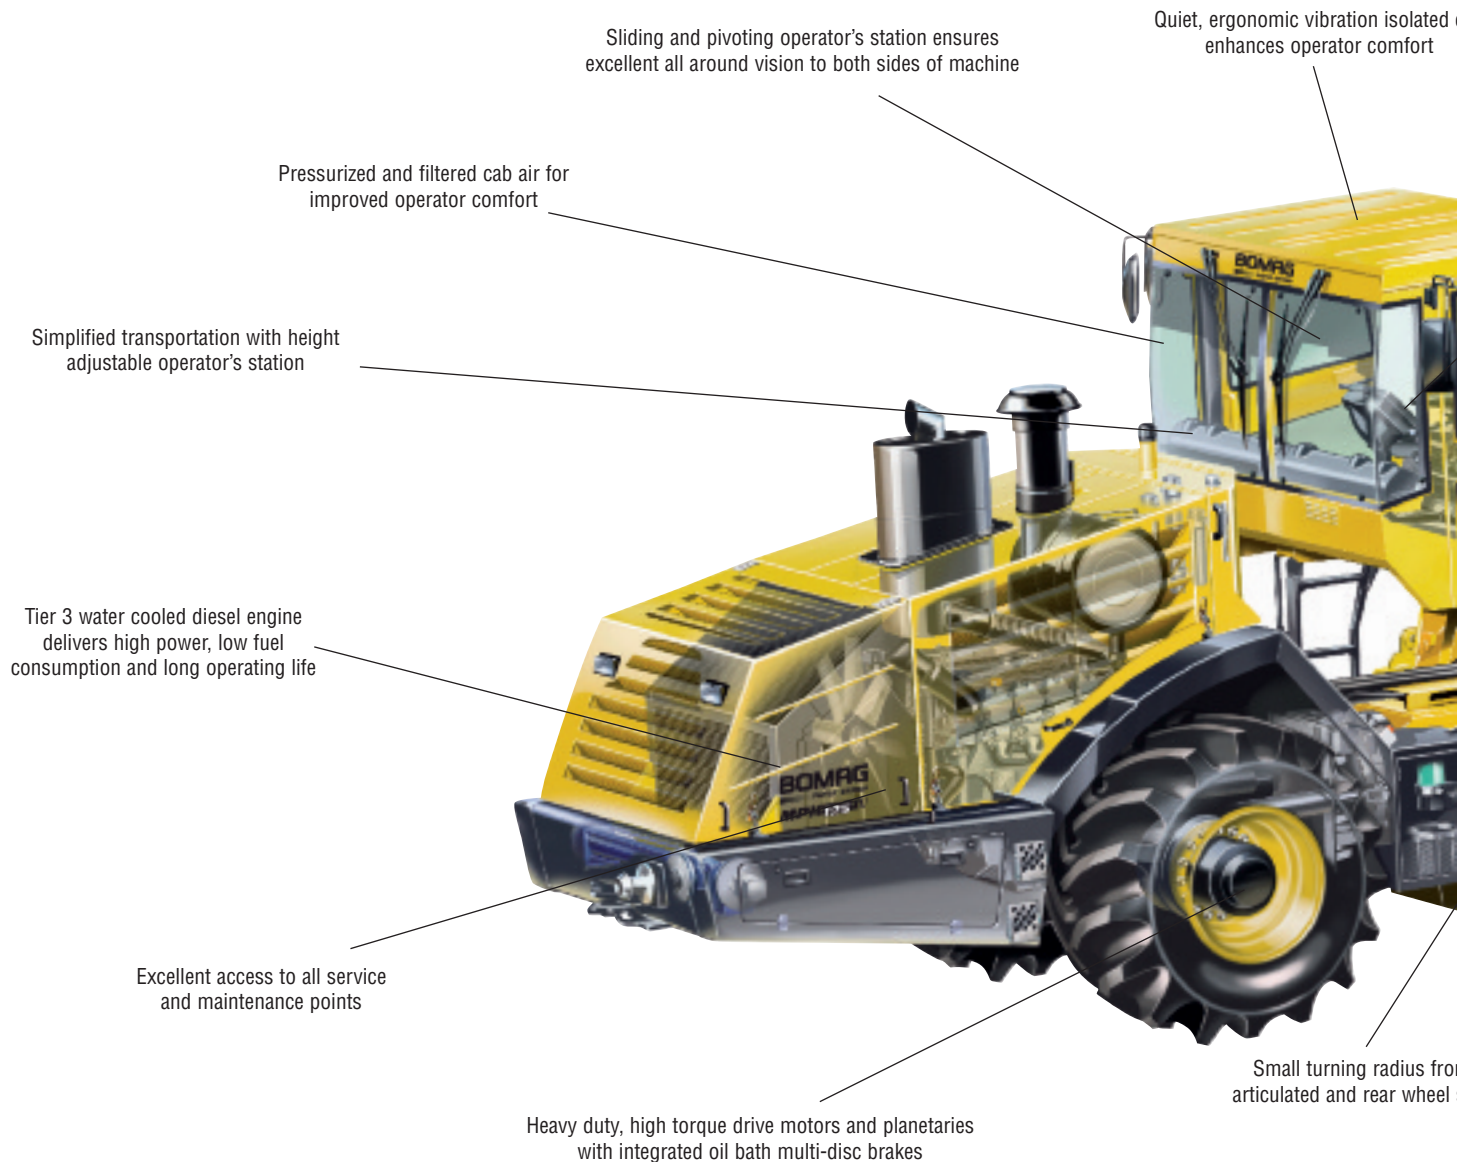

Designed specifically for soil stabilization and full depth reclamation

For demanding soil stabilization and recycling applications BOMAG has developed the MPH 125. In conjunction with contractors around world and years of BOMAG experience in this field has allowed BOMAG to develop the highest power, reliability and efficiency in the MPH 125. The BOMAG MPH 125 is the efficient solution when it comes to mixing lime, fly ash or cement for soil stabilization. When used as an asphalt recycler, the MPH 125 excels in a variety of recycling uses to cut and pulverize damaged surfaces and road pavements.

Many design features distinguish the MPH 125. Optimum vision over the entire work area and excellent maneuverability due to the combination of articulated and rear axle steering, together with powerful rotor and travel drives, ensure consistently good mixing results and superior efficiency. The universal rotor with speeds that can be selected under load, matching the requirements of any construction task. The variable mixing compartment of the rotor will automatically adapt with the cutting depth.

Best for
**STABILIZATION &
RECLAMATION**

n isolated cab
comfort

Clearly arranged instrument display
and operation controls

+/-5° cross-slope rotor oscillation allows
profiling and for correcting irregularities

Air compressor for cleaning
purposes and powering air tools

All wheel drive

radius from the
rear wheel steering

Replaceable bolt-on
rotor end segments

Fast replacement of rotor teeth with
"knock out - knock in" design and
optional bolt-on holder system.

Close-up work is allowed from both sides
due to the flush designed rotor hood

Hydrostatic rotor drive is efficient
and requires minimal maintenance

nation...

■ High reliability

- Powerful Deutz Tier 3 water-cooled turbocharged diesel engine.
- Powerful hydraulic pumps and motors ensure optimum performance, even under extreme load conditions.
- Torsion resistant frame and heavy duty wheel drives provide high reliability.

■ Safety comes first

- High tipping resistance and stability due to low center of gravity.
- Standard Integrated ROPS/FOPS.
- Hydrostatic rotor drive with integrated overload protection.
- Increased safety with automatic rotor shut-down when lifting the rotor out of the soil.
- Safety shut-down when changing the rotor teeth.
- Automatic brake operation after engine shut-down and in case of an emergency stop.



Optimum operator visibility

Outstanding performance and versatility

Productivity and profit:

Maximum productivity on site comes from high reliability and performance under the most extreme conditions.

BOMAG meets this goal through the quality of all components used and the innovative design of the machine.

- Flexibility for stabilizing and recycling work using the universal design rotor.

- Optimum efficiency with lowest wear and maintenance with the use of direct hydrostatic motors integrated in the rotor.
- High versatility with variable rotor speeds.
- +/- 5° rotor cross-slope for shaping profiles or irregularities.

- Ample traction power for pushing tanker trucks – even under severe soil conditions – with all wheel drive and electronic traction control.
- Maximum working power due to automatic power regulation with integrated overload protection.
- High ground clearance protects under carriage from damage due to uneven terrain
- Excellent maneuverability with compact design features and the combination of articulated and rear wheel steering.
- Work close up to both sides with specially designed rotor hood.

I. Soil stabilization with cement and lime in sand and gravel			
Layer thickness - in.	8	12	20
Output - yd ² /day	17900 - 22700	11900 - 19100	7700 - 11900

II. Improvement with lime in mixed soils			
Layer thickness - in.	8	12	20
Output - yd ² /day	11900 - 19100	8900 - 13700	5900 - 8900

III. Pulverization of silt and clay			
Layer thickness - in.	8	12	20
Output - yd ² /day	8900 - 14300	7700 - 11900	5900 - 10700


IV. Mix in place recycling of asphalt roads (normal total cutting depth 9.8-13.8 in)				
Asphalt thickness - in.	4	6	8	10
Output - yd ² /day	7100 - 9500	5700 - 8300	4700 - 7100	3500 - 5900

Production rates can vary depending on materials, moisture content, and application type.

Featuring...



Excellent accessibility for rotor maintenance

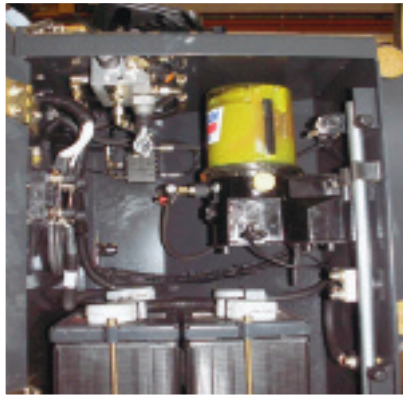

Central lube system reduces maintenance time



Clearly arranged instrument display and operation controls

Reduced operating costs for increased profits

Efficient Service & Maintenance:

The design and service concept of the MPH 125 Stabilizer/Recycler reduces the labor time needed for maintenance work.

- Virtually maintenance free hydrostatic drive system.
- Quick and easy access to all service and maintenance points.
- Hydraulic components and diesel engine can be easily reached through large service doors.
- Hydraulic oil change every 2000 operating hours or every 2 years.
- Automatic lubrication of all bearings on the machine by the central lubrication system.
- Easily accessible filters and batteries as well as lockable doors to protect against vandalism.
- Electronic safety system for comprehensive monitoring of machine operation.
- Easy access to the rotor via high opening rotor hood.
- Easier and safer to check and replace teeth with the hydraulic rotor turning feature.
- Standard compressor system for cleaning and connection to pneumatic tools.
- Bolt on rotor end segments for easy replacement.

Comfortable, simple operation from both sides of the machine:

The location of the operator's platform gives the driver excellent overall vision to the working area. The ergonomically designed and spacious cab ensures fatigue free work with driving and operating comfort.

- A lateral sliding and pivoting work position combined with large-area glass creates a maximum field of vision, unsurpassed by other machines.
- Comfortable seating position with spacious leg room.
- Ergonomic display and controls on the seat unit.
- Simple operation with clear identification of functions.
- Driver comfort with fresh air filtration in dusty conditions.
- Optimum cab temperatures with optional heater and air conditioning.
- In cabin cross slope indicators.
- 2 side view power mirrors enhance visibility.



Excellent view over the working area and material field



Universal rotor with individual bolt-on replaceable end segments




All Wheel Drive and traction control deliver outstanding tractive effort

Technical Specifications

MPH 125

Shipping dimensions in cubic feet (m³)

MPH 125 3120 (88.3)

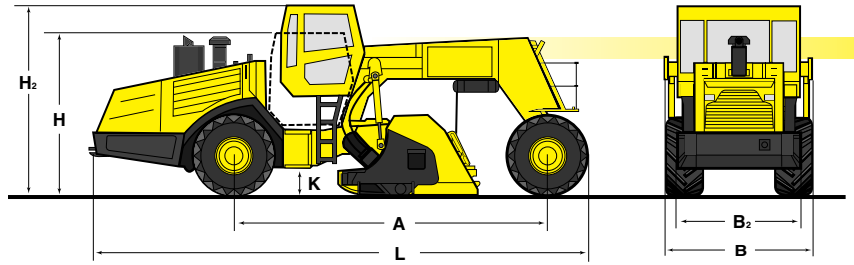

Standard Features

- Hydrostatic all wheel drive
- Traction Control
- Hydrostatic rotor drive with automatic power adjustment
- Hydrostatic articulated steering
- Hydrostatic rear axle steering
- Hydr. adjustable rotor oscillation
- Hydr. tailgate with floating position
- Cab and operator's platform with:
 - integral ROPS/FOPS
 - transport and working position
 - heat and air conditioning
 - pressurized and filtered cab air
 - sliding and pivoting multi-function operator's station
- Central lubrication system
- Air compressor
- Working lights
- Push and draw bars w/ holders
- Lockable storage compartment

Optional Equipment

- Water System (0-420 gpm / 0-1600 lpm)
- Universal Rotor 99.6" width
- Universal Rotor with bolt-on holders 99.6" width
- Universal Rotor with bolt-on holders 91.7" width
- CD/Radio
- Rotary beacon

Dimensions in inches (mm)

	A	B	B ₂	H	H ₂	K	L
MPH 125	244.2 (6203)	112.2 (2850)	110.2 (2800)	122 (3100)	145.7 (3700)	20.1 (510)	393.3 (9990)

Technical data

Weights

Operating Weight CECE..... lbs (kg) 54,014 (24.5)

Drive Characteristics

Speed (1)..... mph (km/h) 0-1.9 (0-3.0)
Speed (2)..... mph (km/h) 0-7.5 (0-12.0)

Drive

Engine manufacturer..... Deutz
Type..... TCD 2015V08
Cooling..... Water
Number of cylinders 8
Performance SAE J 1349 and ISO 9249 hp (kW) 590 (440)
Speed rpm 1,900
Electrical equipment V 24
Drive system hydrostatic/all wheel

Tires

Tire size, front and rear 28LR26

Brakes

Service brake hydrostatic
Parking brake multi disc

Steering

Steering system..... hydraulic/articulating + rear
Track radius inner/outer..... in (mm) 147.6/265.7 (3.75/6.75)

Rotor

Rotor width in (mm) 91.7 (2,330)
Rotor diameter, outer..... in (mm) 55.7 (1,416)
Rotor speed..... rpm 115 - 155
Rotor oscillation angle +/-..... degrees 5
Direction of rotation..... up-cut
Max. cutting depthin (mm) 21.7 (550)
Number of cutting teeth 224
Height of cutting teeth..... in (mm) 7.9 (200)

Capacities

Fuel..... gal (l) 284 (1.075)

Technical modifications reserved. Machines may be shown with options.



BOMAG Americas, Inc.

2000 Kentville Rd. • Kewanee, IL 61443
Tel: 309 853-3571 • Fax: 309 852-0350